

# IAPC SERIES

## Connect under pressure ISO A couplings made to the ISO 7241:2014 Series A Standard

### INTRODUCTION

Holmbury's IAPC Series ISO A couplings incorporate a pressure relief mechanism that enable them to be connected under pressure by hand.

### CONSTRUCTION

- Female half available in either a 'Pull Break' or 'Push Pull' design (See drawing for differentiation)
- Carbon steel with trivalent plating
- Fitted with Nitrile seals

### FEATURES

- Connects with up to 250 bar residual pressure (If both male and female are IAPC couplings)
- Poppet valves have balanced springs
- Locking ball system allows quick connection
- Bidirectional flow

### ACCESSORIES

- Dust Caps and Plugs are available for the IAPC Series




### SPECIFICATIONS

- Operating temperatures (with Nitrile seals): -40°C (-40°F) to 106°C (223°F)


### APPLICATIONS

- Agricultural
- Mobile
- Construction


### ORDER CODES

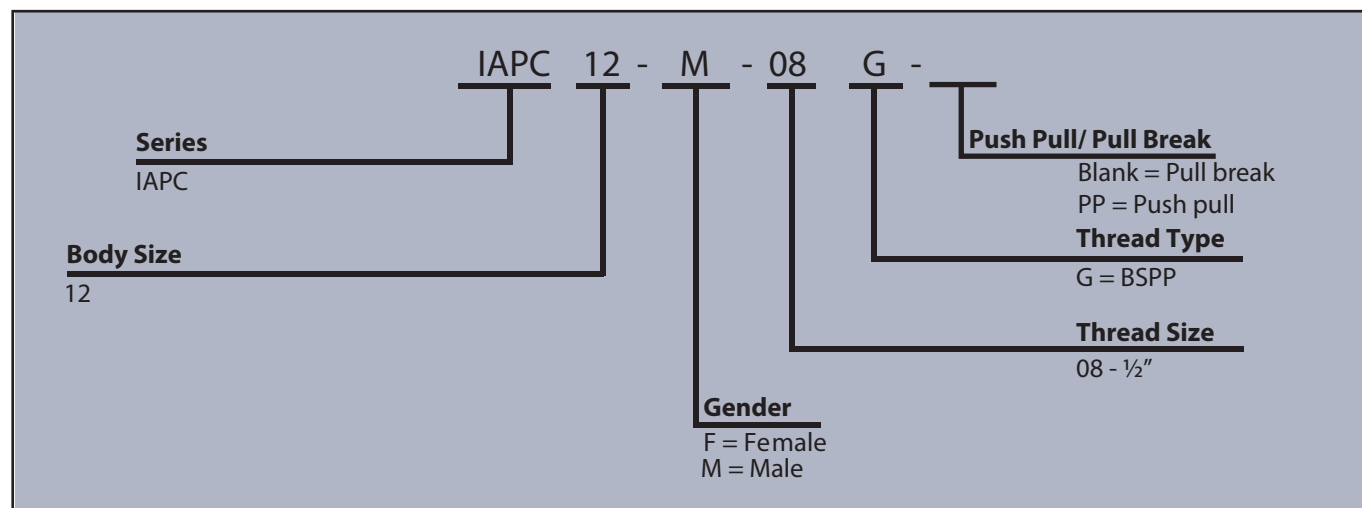

## DRAWING

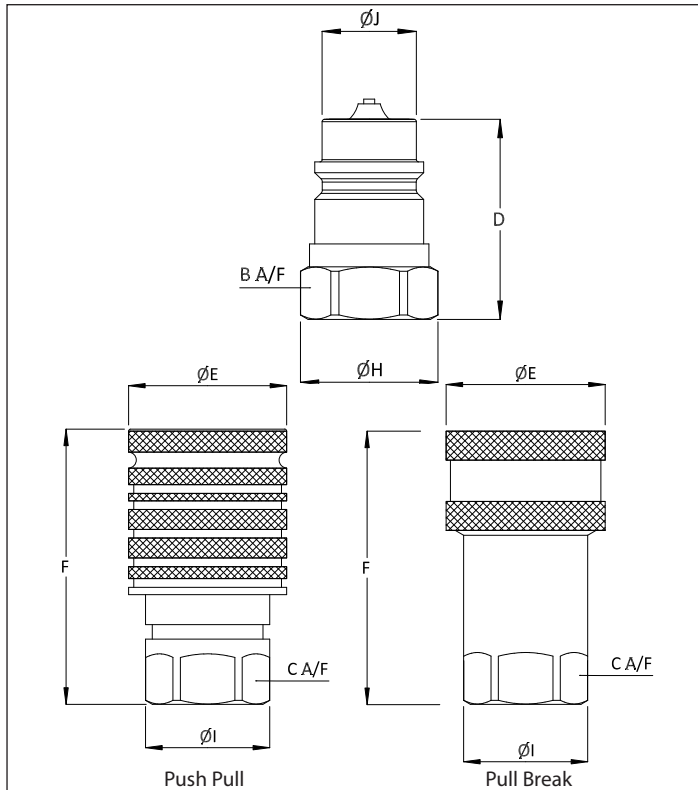

## PRESSURE DROP CHARACTERISTICS

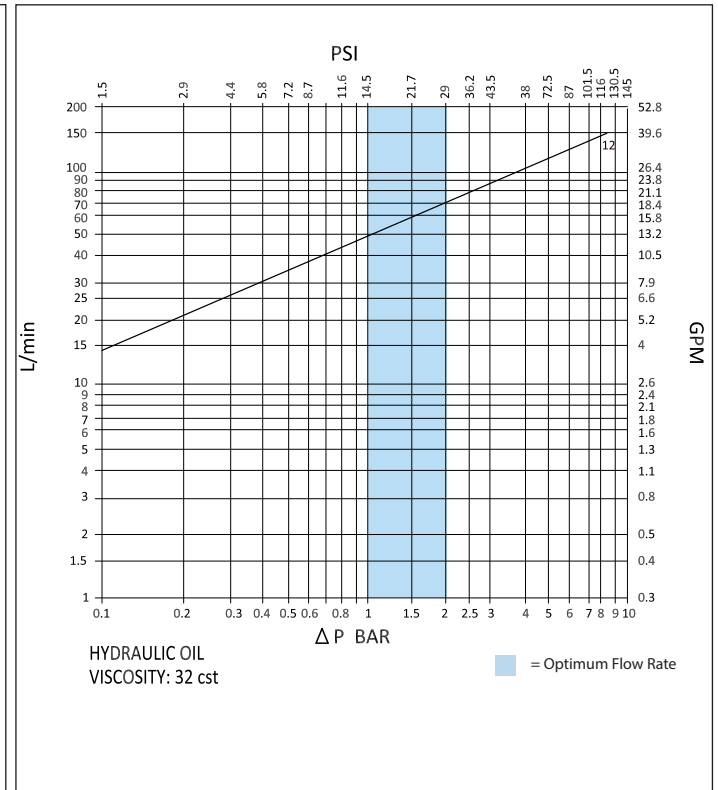

## DIMENSIONS

Size	Thread Size (A)	B	C	D	$\varnothing E$	F	$\varnothing H$	$\varnothing I$	$\varnothing J$	Maximum Working Pressure	Burst Pressure (Coupled)	Burst Pressure (Male)	Burst Pressure (Female)
		Dimensions in mm								Bar			
		Dimensions in Inches								Psi			
IAPC 12	1/2"	26.7	26.9	43.5	38.7	66.2	29.7	30.0	20.4	320	1500	1500	1400
		1.1	1.1	1.7	1.5	2.6	1.2	1.2	0.8	4640	21750	21750	20300
IAPC 12 (PP)	1/2"	26.7			38.0	66.5		29.8		320	1500	1500	1400
		1.1			1.5	2.6		1.2		4640	21750	21750	20300

PSI= Bar x14.5 Inches= mm/25.4