

DTP SERIES

Diagnostic test point couplings made to the ISO 15171-1 Standard

INTRODUCTION

Holmbury's DTP Series diagnostic test point couplings are designed to connect & disconnect pressure gauges to hydraulic systems for diagnostic purposes.

CONSTRUCTION

- Carbon steel with trivalent plating
- Fitted with Nitrile seals

FEATURES

- Pull sleeve allows push to connect operation
- Allows for minimal inclusion of air and contaminants during connection
- Flat face design prevents fluid loss during disconnection
- Bidirectional flow

ACCESSORIES

- Dust Caps are available for the DTP Series




SPECIFICATIONS

- Operating temperatures (with Nitrile seals): -40°C (-40°F) to 106°C (223°F)


APPLICATIONS

- Pressure testing on hydraulic systems

ORDER CODES

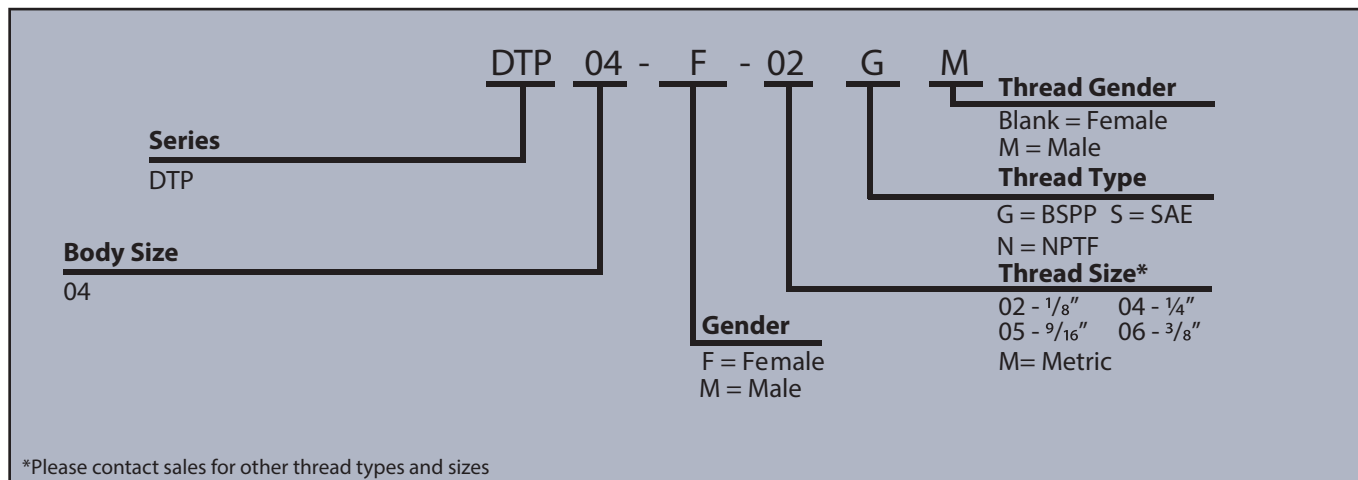

DRAWING

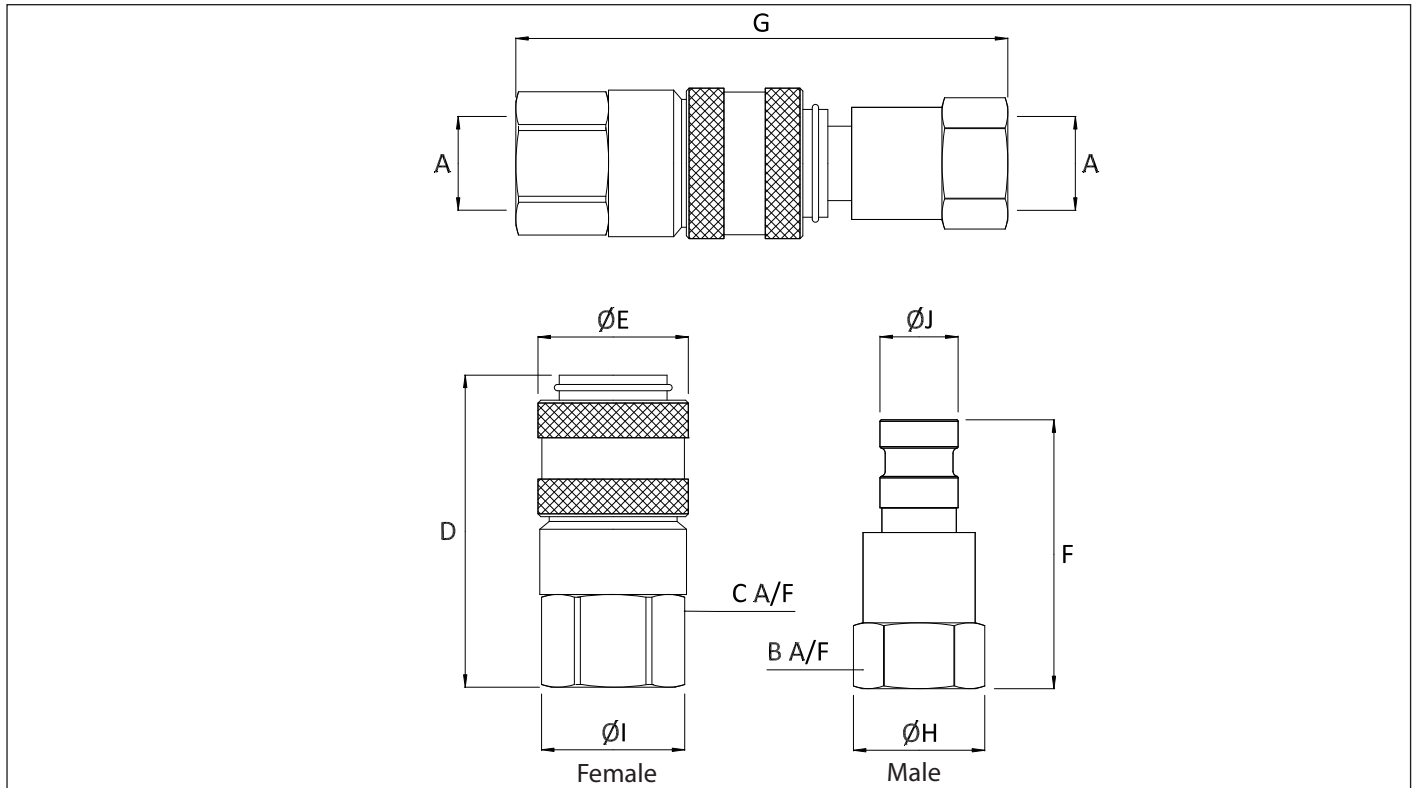

DIMENSIONS

Size	Thread Size (A)	B	C	D	ØE	F	G	ØH	ØI	ØJ	Maximum Working Pressure
Dimensions in mm											Bar
Dimensions in Inches											Psi
DTP 04	1/8"	18.9	21.0	45.6	24.1	43.0	74.2	21.0	23.0	12.6	400
		0.7	0.8	1.8	0.9	1.7	2.9	0.8	0.9	0.5	5800
DTP 04	1/4"	18.9	21.0	50.0	24.1	43.1	78.9	21.0	23.0	12.6	400
		0.7	0.8	2.0	0.9	1.7	3.1	0.8	0.9	0.5	5800
DTP 04	9/16"	18.9	21.0	50.0	24.1	43.1	78.9	21.0	23.0	12.6	400
		0.7	0.8	2.0	0.9	1.7	3.1	0.8	0.9	0.5	5800

Note: Dimensions D, F and G may vary dependant on selected thread type

PSI= Bar x14.5 Inches= mm/25.4